




### Approvals

Pipe materials and sizes in appropriate thickness for floor slabs. All results are based on 150mm thick slab. For thicker or thinner slabs or other sizes and types of pipe, please consult Promat.

Code no.	Pipe material	Pipe size	FRL
CIL 40	uPVC	40mm	-/180/180
CIL 50	uPVC	50mm	-/180/180
CIL 65	uPVC	65mm	-/180/180
CIL 80	uPVC	80mm	-/180/180
CIL 100	uPVC	100mm	-/180/180
CIL 40	HDPE	40mm	-/240/180
CIL 50	HDPE	50mm	-/180/180
CIL 65	HDPE	56mm	-/240/180
CIL 65	HDPE	63mm	-/120/120
CIL 100	HDPE	110mm	-/120/120

### Dimensions

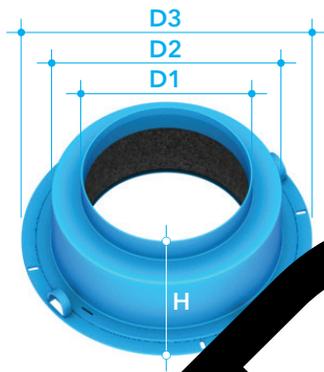

Code no.	H	B	Flange		
			D1	D2	D3
CIL 40	49mm + 30mm*	43mm	115mm	160mm	
CIL 50	59mm + 30mm*	56mm	115mm	160mm	
CIL 65	49mm + 30mm*	69mm	115mm	160mm	
CIL 80	60mm + 20mm*	80mm	163mm	210mm	
CIL 100	60mm + 20mm*	110mm	163mm	210mm	

\*Additional height of upright pipe

Promat provides a wide range of systems for compartmentation, fire resistant air and cable ducts, structural steel protection, fire stopping and penetration seals. For assistance with any passive fire protection problems, please consult Promat.



Promat Australia Pty Ltd

[www.promat.com.au](http://www.promat.com.au)

T 1800 PROMAT (776 628) E [mail@promat.com.au](mailto:mail@promat.com.au)  
 F (08) 8352 1014 (Head office) (02) 9630 0258 (New South Wales)  
 1800 334 598 (Victoria / Queensland)